

## ▼ 3.1/02

### Hopper for Müller drum Type 90

Symmetrical stainless steel hopper

Lid rim deep-drawn, pressed cone

All seams butt-welded, smoothed and polished

Patented stainless steel valve with clamp closing and hand lever



3.1/02

#### ▼ 7.8 Sealing

- in food grade quality
- exchangeable

#### ▼ 7.2 Cone

- hopper rim fitted with seal
- adaptable to the drum with a clamping ring
- angle of repose 90°
- use for easy flowing bulk material

#### ▼ 7.6 Valve with hand lever Type MC

- dust - tight
- continuously adjustable
- sealable
- easy to clean
- easy to assemble

#### ▼ 7.1 Outlet tube

- for dust-free docking

#### ▼ 7.8 Accessories

- sight glass
- discharge aids
- vibrator



Datasheet

## Hopper for Müller drum Type 90

3.1/02 ▼



**Material:**




**Cone, outlet tube, valve flanges and valve disk made of stainless steel AISI 316L**

**Clamp, hand lever made of stainless steel AISI 304**

**Sealing made of silicone food grade quality**

**Surface:**

**All parts inside and outside polished and brushed to a 320 grit**

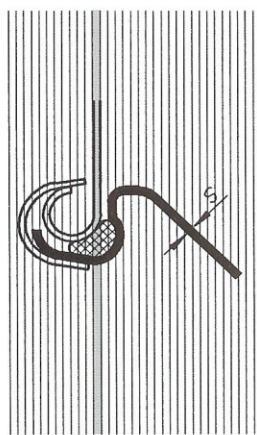

NW	H	B	S	G	V	ART. NR.	ND	L*
100	156	44	1,2	7,9	0,3	0826418	170	
100	198	44	1,2	8,2	1,4	0826419	250	
150	173	44	1,2	8,0	1,1	0826251	250	
100	229	44	1,2	8,6	3,2	0826420	315	
150	204	44	1,2	8,3	2,9	0826253	315	○
200	179	44	1,2	9,7	2,3	0826254	315	
100	260	44	1,2	9,0	5,7	0826421	375	
150	234	44	1,2	8,6	5,4	0826256	375	
200	209	44	1,2	10,0	4,8	0826257	375	○
250	184	44	1,2	11,7	3,8	0826258	375	
100	295	44	1,2	9,7	10,2	0826422	450	
150	270	44	1,2	9,0	9,9	0826260	450	
200	245	44	1,2	10,5	9,3	0826261	450	
250	220	44	1,2	12,1	8,3	0826262	450	○
300	201	52	1,2	17,1	6,8	0826263	450	
100	351	44	1,2	10,8	20,4	0826423	560	
150	326	44	1,2	9,9	20,1	0826264	560	
200	301	44	1,2	11,3	19,5	0826265	560	
250	276	44	1,2	12,9	18,5	0826266	560	○
300	257	52	1,2	17,9	17,0	0826267	560	
100	367	44	1,5	12,3	25,2	0826424	600	
150	342	44	1,5	10,9	24,9	0826268	600	
200	317	44	1,5	12,2	24,3	0826269	600	
250	291	44	1,5	13,9	23,3	0826270	600	○
300	273	52	1,5	18,8	21,9	0826271	600	
100	420	44	1,5	14,2	42,5	0826425	710	
150	395	44	1,5	12,2	42,2	0826272	710	
200	370	44	1,5	13,6	41,7	0826273	710	
250	345	44	1,5	15,2	40,7	0826274	710	○
300	326	52	1,5	20,1	39,2	0826275	710	

NW = nominal diameter outlet tube, H = hopper height, B = valve height, s = sheet thickness, G = weight in kg, V = volume in litre, ND = nominal diameter hopper inlet, L ● = available from stock, L ○ = to be preferred

Müller GmbH  
P.O.Box 1409  
D-79604 Rheinfelden

Phone (+49) 76 23-9 69-0  
Fax (+49) 76 23-9 69-69  
<http://www.mueller-gmbh.com>



Quality management  
ISO 9001/EN 29001

A Division of the  
**MÜLLER** Group