

### ▼ 3.1/03


## Hopper for Müller drum Type AS

Asymmetrical stainless steel hopper

Lid rim deep-drawn, cone fabricated

All seams butt-welded, smoothed and polished

Patented stainless steel valve with clamp closing and hand lever

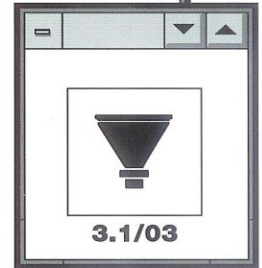

#### ▼ 7.8 Sealing

- in food grade quality
- exchangeable

#### ▼ 7.2 Cone

- hopper rim fitted with seal
- adaptable to the drum with a clamping ring
- asymmetrical angle of repose
- use for difficult flowing bulk material

#### ▼ 7.6 Valve with hand lever Type MC

- dust - tight
- continuously adjustable
- sealable
- easy to clean
- easy to assemble

#### ▼ 7.1 Outlet tube

- for dust-free docking

#### ▼ 7.8 Accessories

- sight glass
- discharge aids
- vibrator





## Hopper for Müller drum Type AS

3.1/03 ▼

**Material:**




**Cone, outlet tube, valve flange and valve disk made of stainless steel AISI 316L**

**Clamp, hand lever made of stainless steel AISI 304**

**Sealing made of silicone food grade quality**

**Surface:**

**All parts inside and outside polished and brushed to a 320 grit**

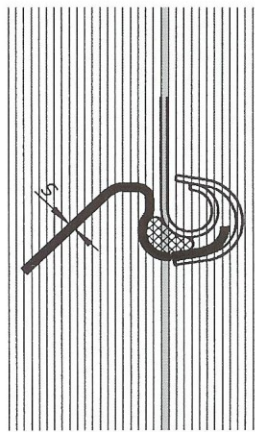

NW	H	Vers.	B	S	G	V	ART. NR.	ND	L*
100	250	52,0	44	1,2	6,4	2,7	0826401	250	
150	206	33,0	44	1,2	8,0	2,0	0826359	250	
100	306	76,0	44	1,2	6,7	6,0	0826399	315	
150	262	57,0	44	1,2	8,3	5,0	0826361	315	○
200	218	38,0	44	1,2	9,7	4,0	0826362	315	
100	358	99,0	44	1,2	7,0	10,0	0826402	375	
150	314	80,0	44	1,2	8,6	9,3	0826364	375	
200	270	61,0	44	1,2	10,0	8,3	0826365	375	○
250	227	42,0	44	1,2	11,7	6,5	0826366	375	
100	422	127,0	44	1,2	7,4	18,0	0826398	450	
150	378	108,0	44	1,2	9,0	17,2	0826368	450	
200	334	89,0	44	1,2	10,5	16,1	0826369	450	
250	290	70,0	44	1,2	12,1	14,4	0826370	450	○
300	253	51,0	52	1,2	17,1	11,8	0826371	450	
100	519	168,0	44	1,2	8,3	36,0	0826403	560	
150	476	149,0	44	1,2	9,9	34,9	0826372	560	
200	432	131,0	44	1,2	11,3	33,8	0826373	560	●
250	388	112,0	44	1,2	12,9	32,1	0826374	560	●
300	350	93,0	52	1,2	17,9	29,5	0826375	560	
100	550	183,0	44	1,5	9,3	45,0	0826404	600	
150	507	164,0	44	1,5	10,9	43,1	0826376	600	
200	463	146,0	44	1,5	12,2	42,1	0826377	600	
250	419	127,0	44	1,5	13,9	40,4	0826378	600	○
300	381	108,0	52	1,5	18,8	37,9	0826379	600	
100	645	225,0	44	1,5	10,6	76,0	0826405	710	
150	602	206,0	44	1,5	12,2	73,2	0826380	710	
200	558	187,0	44	1,5	13,6	72,2	0826381	710	
250	514	168,0	44	1,5	15,2	70,5	0826382	710	○
300	476	149,0	52	1,5	20,1	68,0	0826383	710	

NW = nominal diameter outlet tube, H = hopper height, B = valve height, s = sheet thickness, G = weight in kg, V = volume in litre, ND = nominal diameter hopper inlet, L ● = available from stock, L ○ = to be preferred

Müller GmbH  
P.O.Box 1409  
D-79604 Rheinfelden

Phone (+49) 76 23-9 69-0  
Fax (+49) 76 23-9 69-69  
<http://www.mueller-gmbh.com>



Quality management  
ISO 9001/EN 29001

A Division of the  
**MÜLLER** Group